

**FIG. 1**

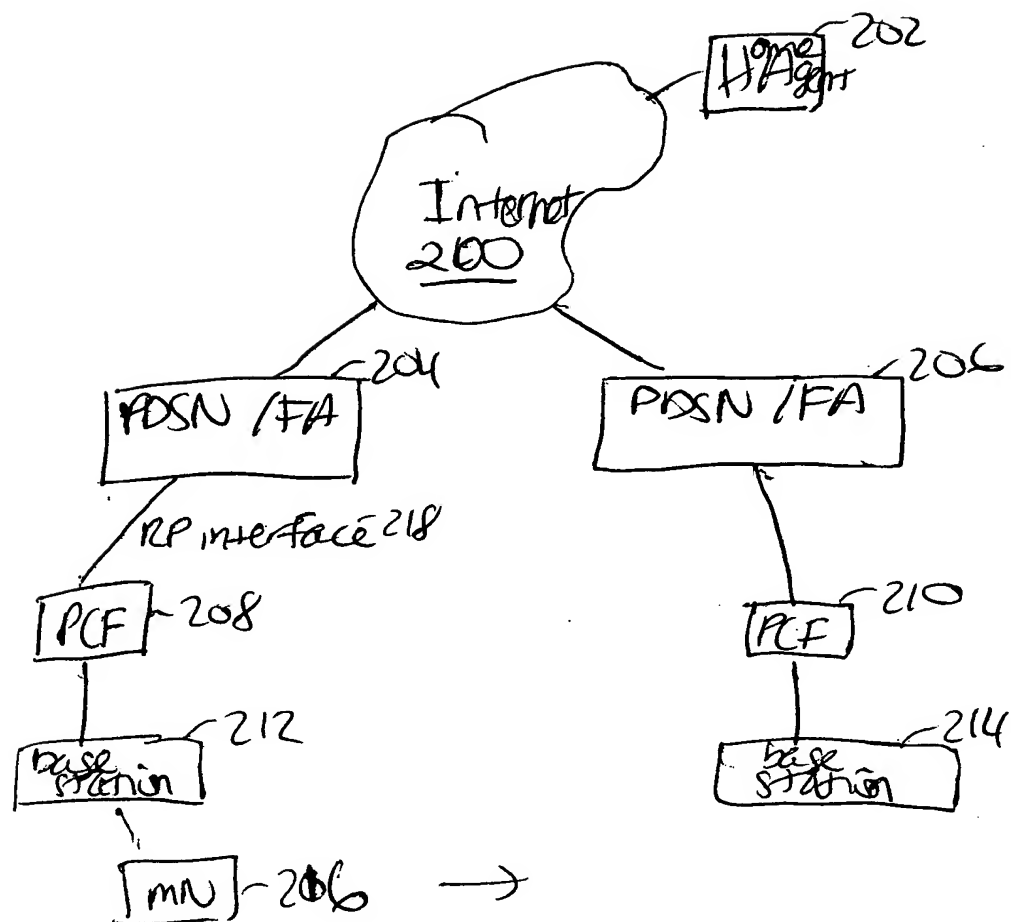


FIG. 2

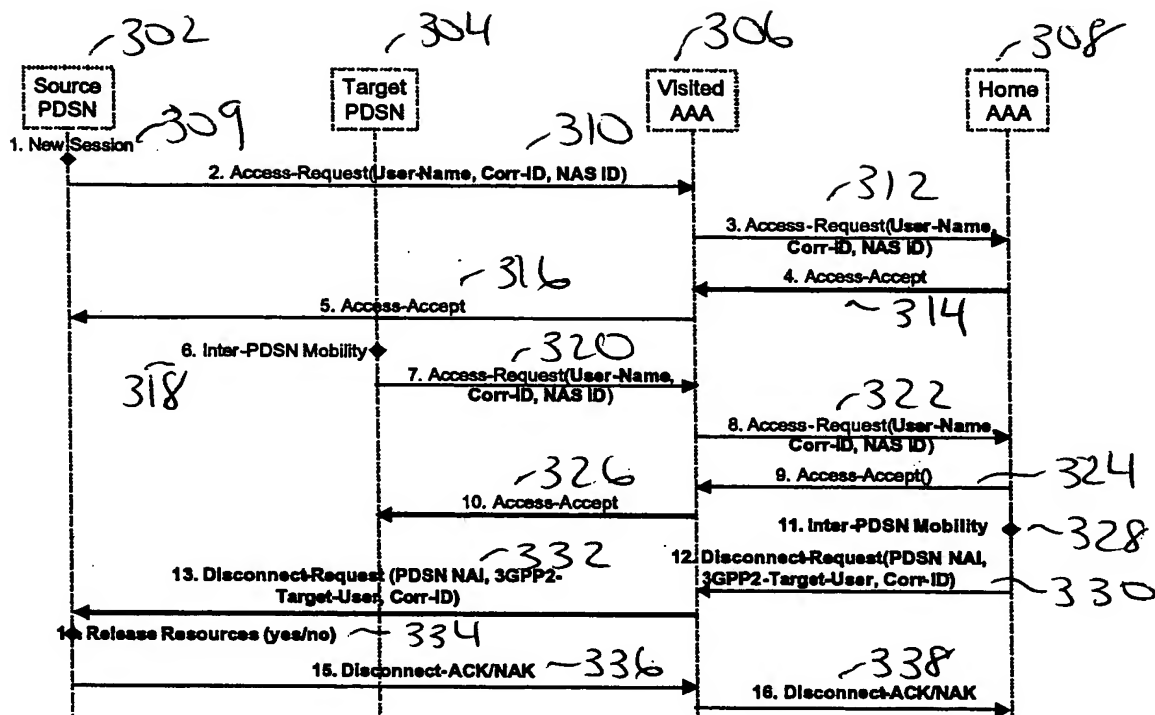


FIG. 3

## Examples

### Access-Request:

Username="gwz@cisco.com"  
NAS ID="PDSN01.carrier.com"

### Disconnect Request:

Username="PDSN01@carrier.com"  
3GPP2-Target-User="gwz@cisco.com"

### Disconnect ACK/NAK:

Username="gwz@cisco.com"  
NAS-Identifier="PDSN01.carrier.com"

### Tables (Bilateral agreement)

PDSN01.carrier.com

Realm	IP Addr of server	Secret
*	1.2.3.4	mysecret0

AAA.carrier.com (VAAA)

Realm	IP Addr of server	Secret

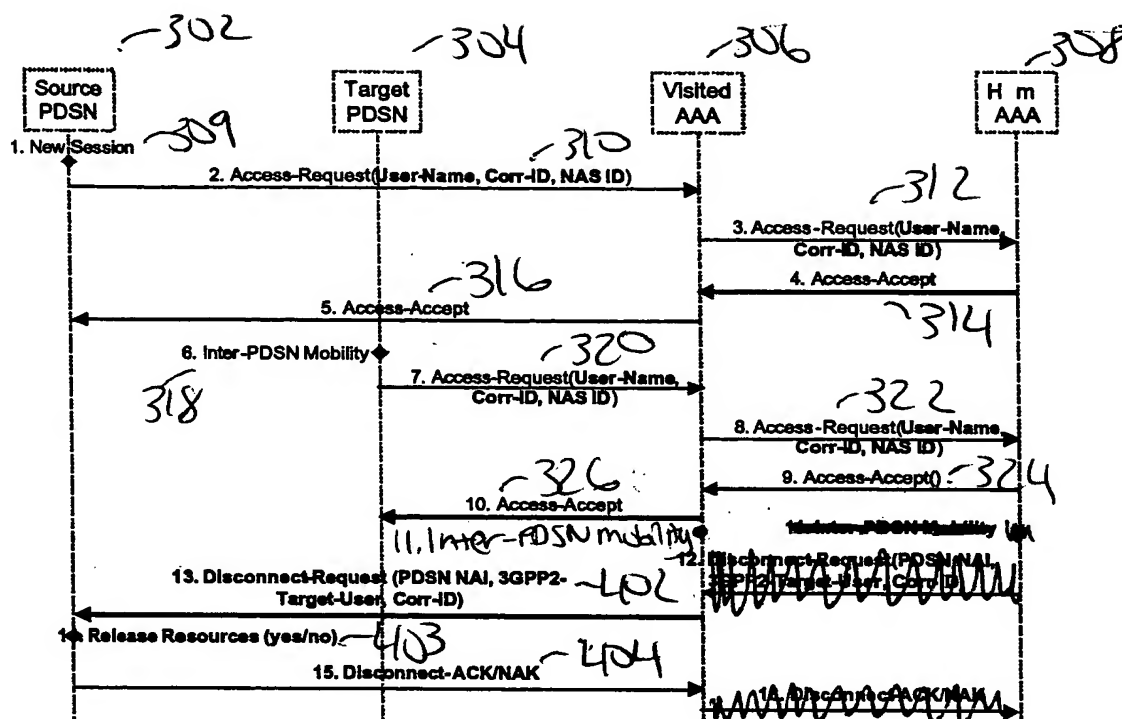


FIG. 4

## Examples

### Access-Request:

Username="gwz@cisco.com"  
NAS ID="PDSN01.carrier.com"

### Disconnect Request:

Username="PDSN01@carrier.com"  
3GPP2-Target-User="gwz@cisco.com"

### Disconnect ACK/NAK:

Username="gwz@cisco.com"  
NAS-Identifier="PDSN01.carrier.com"

### Tables (Bi-lateral agreement)

PDSN01.carrier.com

Realm	IP Addr of server	Secret
*	1.2.3.4	mysecret0

AAA.carrier.com (VAAA)

Realm	IP Addr of server	Secret

Disconnect request  
message

PDSN identifier	Username identifier	Session identifier
-----------------	------------------------	--------------------

FIG. 5

Disconnect  
acknowledgement


PDSN identifier	Username identifier	Session identifier
-----------------	------------------------	-----------------------

FIG. 6

Disconnect non-  
acknowledgement

PDSN identifier	Username identifier	Failure cause	Session identifier
-----------------	------------------------	------------------	-----------------------

FIG. 7

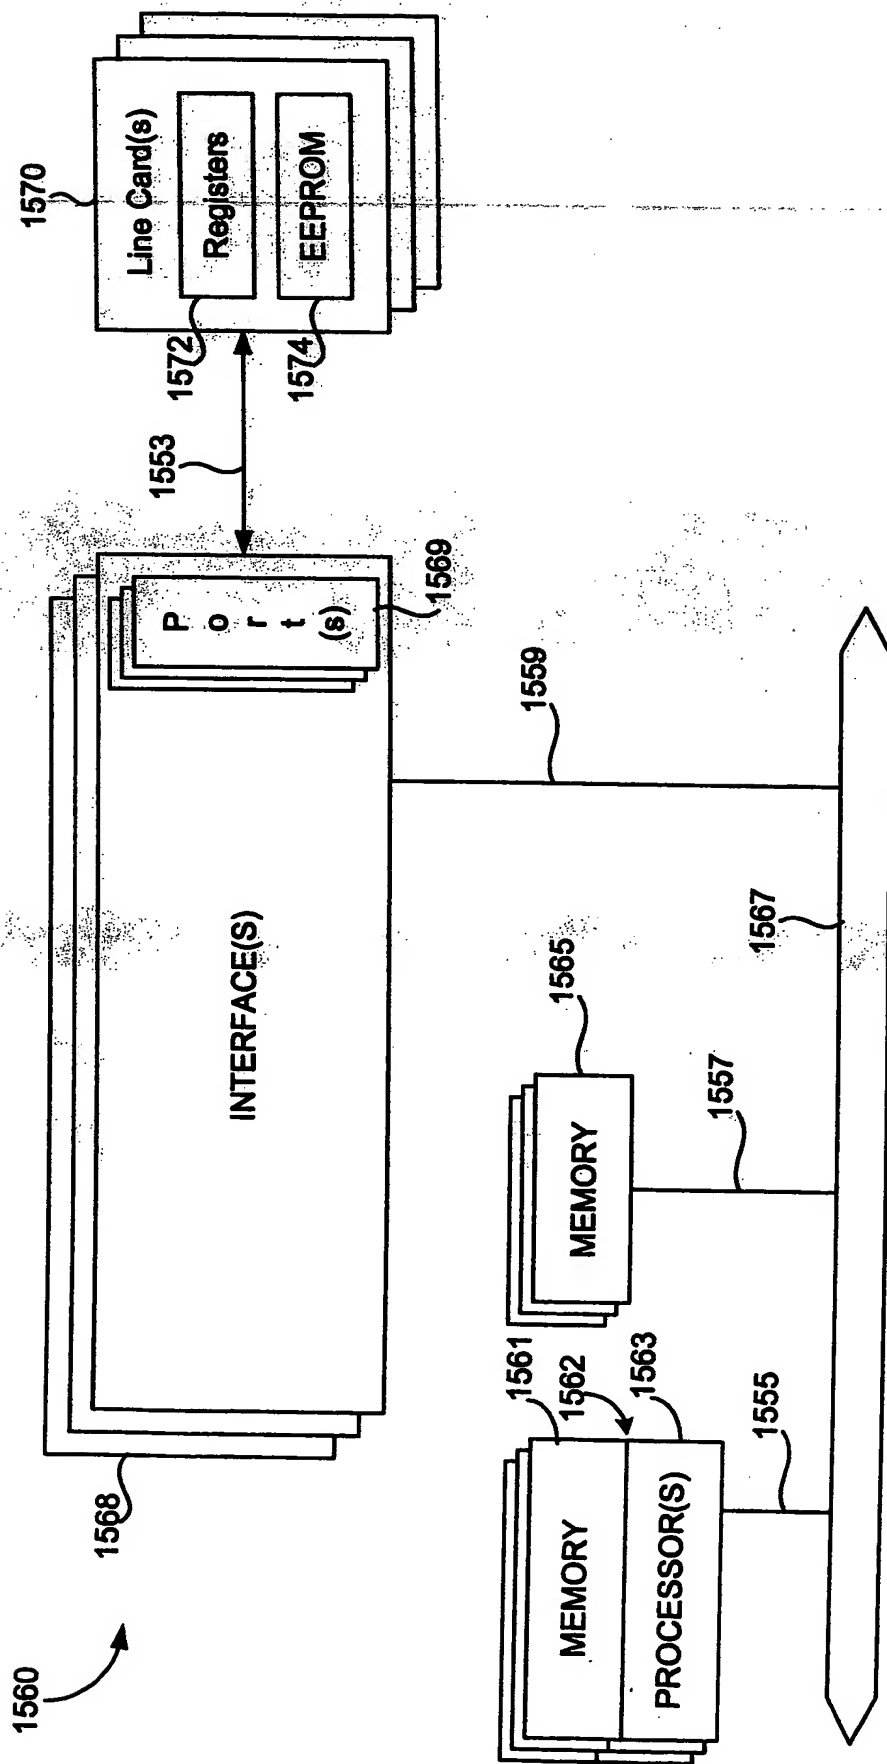

**FIG. 1**